




# MaxiForce Fixed Bollard

Standard Body, Standard Style Head


MFSN-  
Product code

## Available Head Styles


Choose One

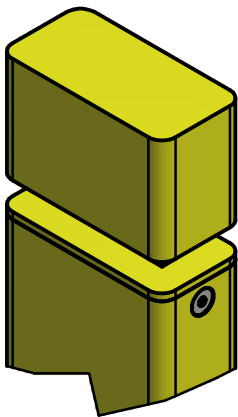

☐ SS1  
*as shown*

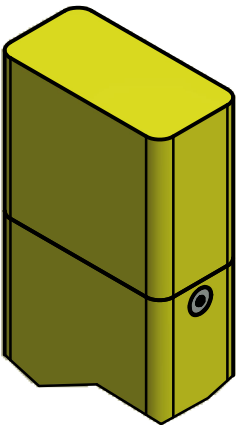


☐ SS2

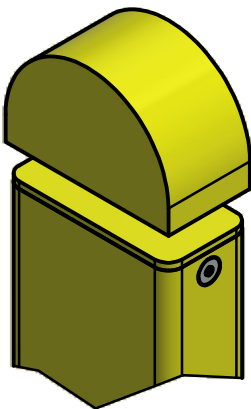

☐ SS3

MaxiForce Fixed Bollards do not require the use of bases for installation purposes. The Fixed Bollards are installed directly into a concrete foundation.

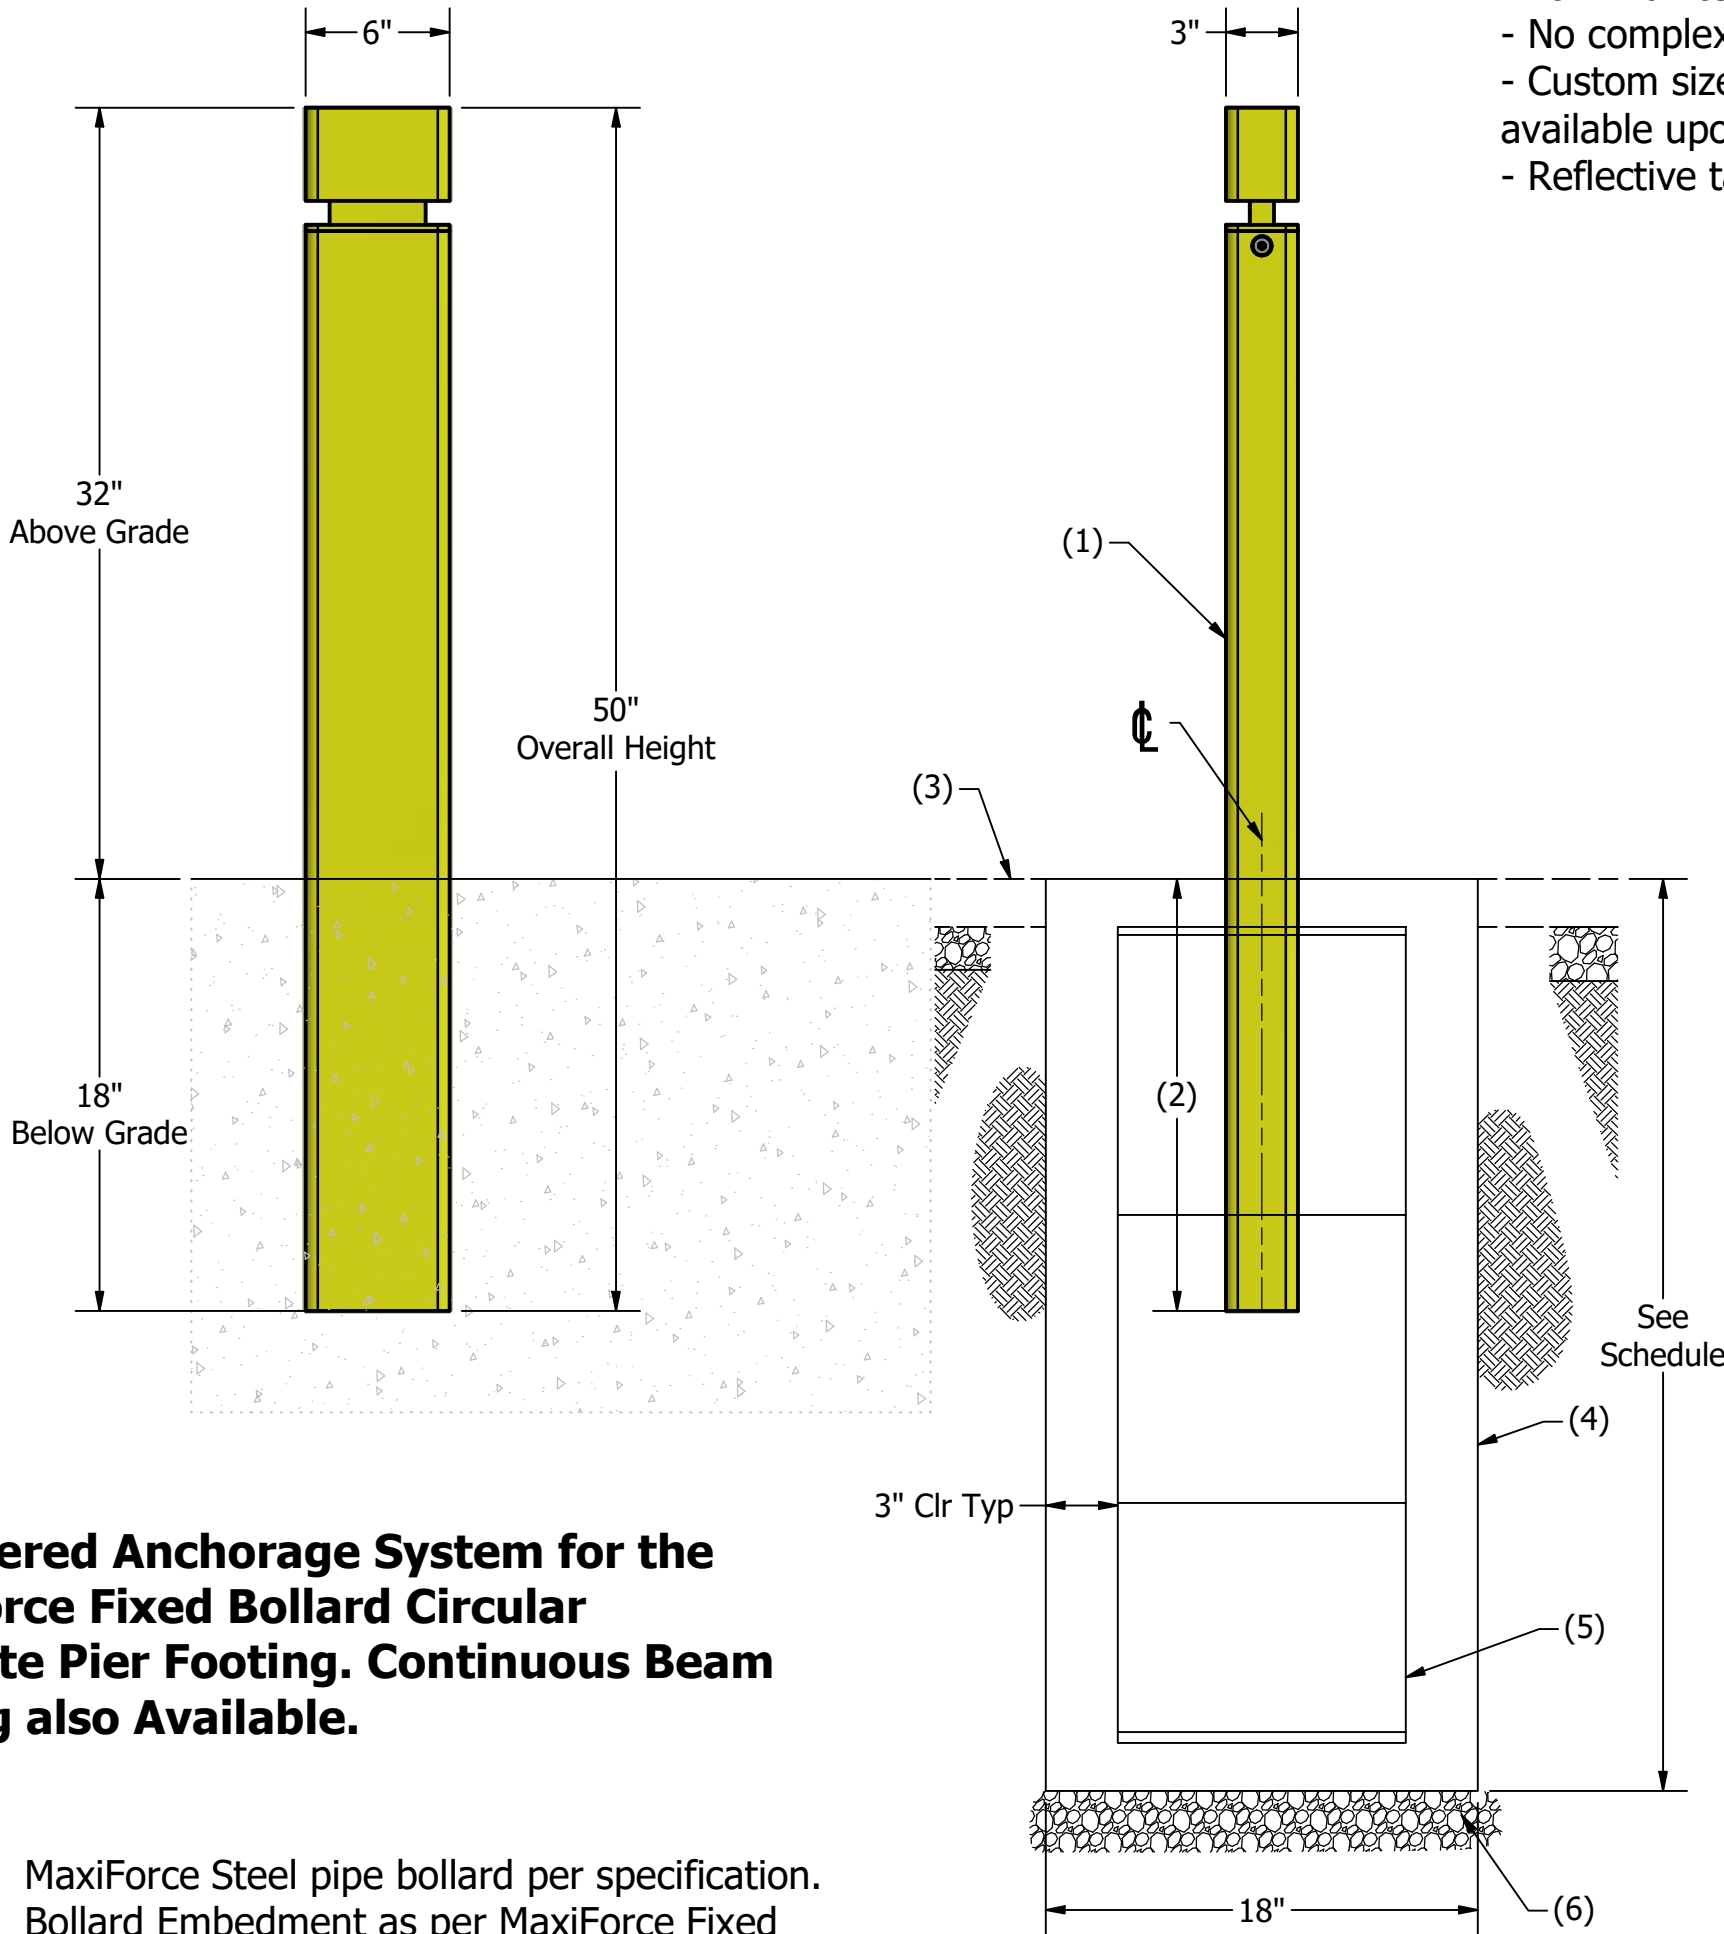


### Engineered Anchorage System for the MaxiForce Fixed Bollard Circular Concrete Pier Footing. Continuous Beam Footing also Available.

1. MaxiForce Steel pipe bollard per specification.
2. Bollard Embedment as per MaxiForce Fixed Steel Bollard installation.
3. Finished grade or pavement.
4. Concrete base pier per schedule, at each pipe sleeve.
5. #3 hoop ties at 12" O.C. and 2 - #3 ties at top and bottom of concrete pier.
6. Compacted gravel bed (3" minimum).

- Low maintenance / durable steel construction
- No complex assembly required in the field
- Custom sizes, options, colors and finishes available upon request
- Reflective tape available upon request

### Installation Orientation

Public Side



Protected Side

Bollard Assy. Weight 62 lb	Base Weight
Drawing Rev. 2	Created 4/18/2023
<b>PROPRIETARY AND CONFIDENTIAL</b>	
THIS DRAWING CONTAINS PROPRIETARY INFORMATION OF BLUE EMBER TECHNOLOGIES, LLC. ANY USE OF THIS DRAWING OR THE INFORMATION CONTAINED HEREIN FOR OTHER THAN THE PURPOSE FOR WHICH THIS DRAWING IS FURNISHED IS FORBIDDEN.	

### Finish Options

- ☐ PC - Powder Coated
- ☐ PCZ - Primed w/ DRYZINC Primer
- ☐ G - Hot Dip Galvanized
- ☐ GPC - Hot Dip Galvanized and Powder Coated

PC Color (if applicable): \_\_\_\_\_

### MaxiForce

7560 Main Street  
Sykesville, MD 21784  
tel: +1 (410) 552 9888  
sales@maxiforcebollards.com  
www.maxiforcebollards.com



MF Fixed  
Bollard

C

DO NOT SCALE DRAWING

SHEET 1 OF 1