




Product code

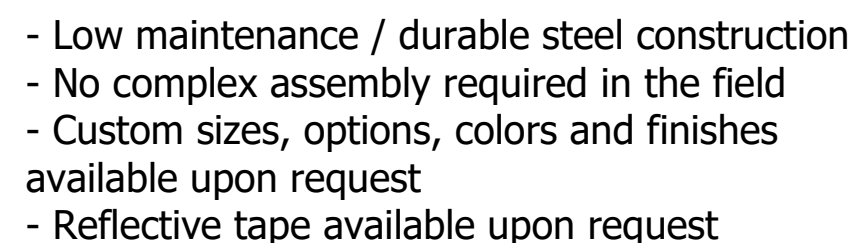

1. MaxiForce Steel pipe bollard per specification.
2. Bollard Embedment as per MaxiForce Fixed Steel Bollard installation.
3. Finished grade or pavement.
4. Concrete base pier per schedule, at each pipe sleeve.
5. #3 hoop ties at 12" O.C. and 2 - #3 ties at top and bottom of concrete pier.
6. Compacted gravel bed (3" minimum).

*The overall height stated on the current drawing applies to the head style shown (RS1). The head style selected will affect the overall bollard height.

Choose One



*RS1 and RS2 heads only apply to the 5" bollards (not available for other sizes of bollards).

Protected Side

Bollard Assy. Weight 69 lb	Base Weight
Drawing Rev. 2	Created 4/18/2023

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS PROPRIETARY INFORMATION OF **BLUE EMBER TECHNOLOGIES LLC**. ANY USE OF THIS DRAWING OR THE INFORMATION CONTAINED HEREIN FOR OTHER THAN THE PURPOSE FOR WHICH THIS DRAWING IS FURNISHED IS FORBIDDEN.

☐ PC - Powder Coated
☐ PCZ - Primed w/ DRYZINC Primer
☐ G - Hot Dip Galvanized
☐ GPC - Hot Dip Galvanized and Powder Coated
 PC Color (if applicable): _____

7560 Main Street
Sykesville, MD 21784
tel: +1 (410) 552 9888
sales@maxiforcebollards.com
www.maxiforcebollards.com

