




MaxiForce Light Removable Bollard


Standard Body, Padlock Operated, Standard Style Head, and Base

MRSP-
Product code


Available Head Styles
Choose One

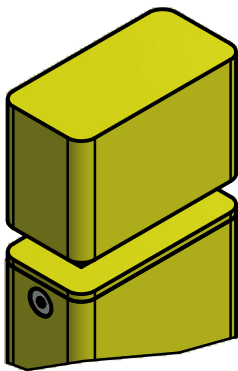

☐ SS1
as shown

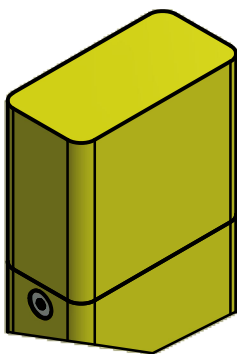


☐ SS2

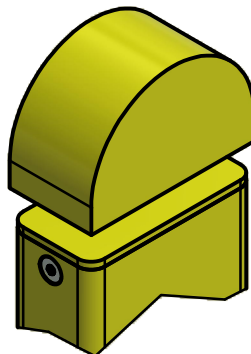

☐ SS3

Available Base Styles

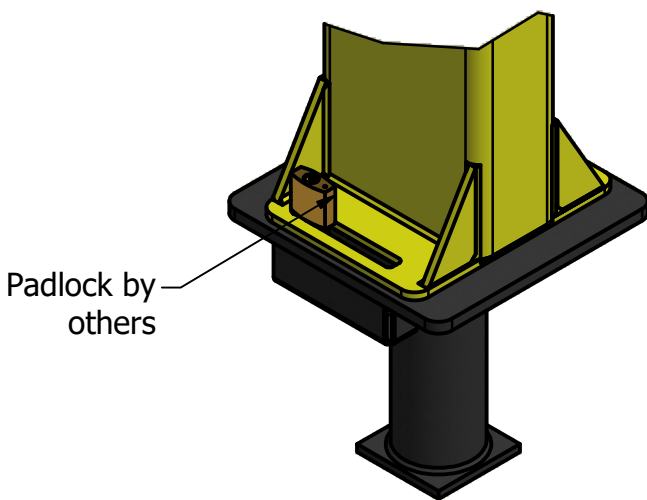

☐ R
Removable Base
as shown

Finish Options

- ☐ PC - Powder Coated
- ☐ PCZ - Primed w/ DRYZINC Primer
- ☐ G - Hot Dip Galvanized
- ☐ GPC - Hot Dip Galvanized and Powder Coated

PC Color (if applicable): _____

MaxiForce
7560 Main Street
Sykesville, MD 21784
tel: +1 (410) 552 9888
sales@maxiforcebollards.com
www.maxiforcebollards.com




MF Light
Removable

C

DO NOT SCALE DRAWING

SHEET 1 OF 1

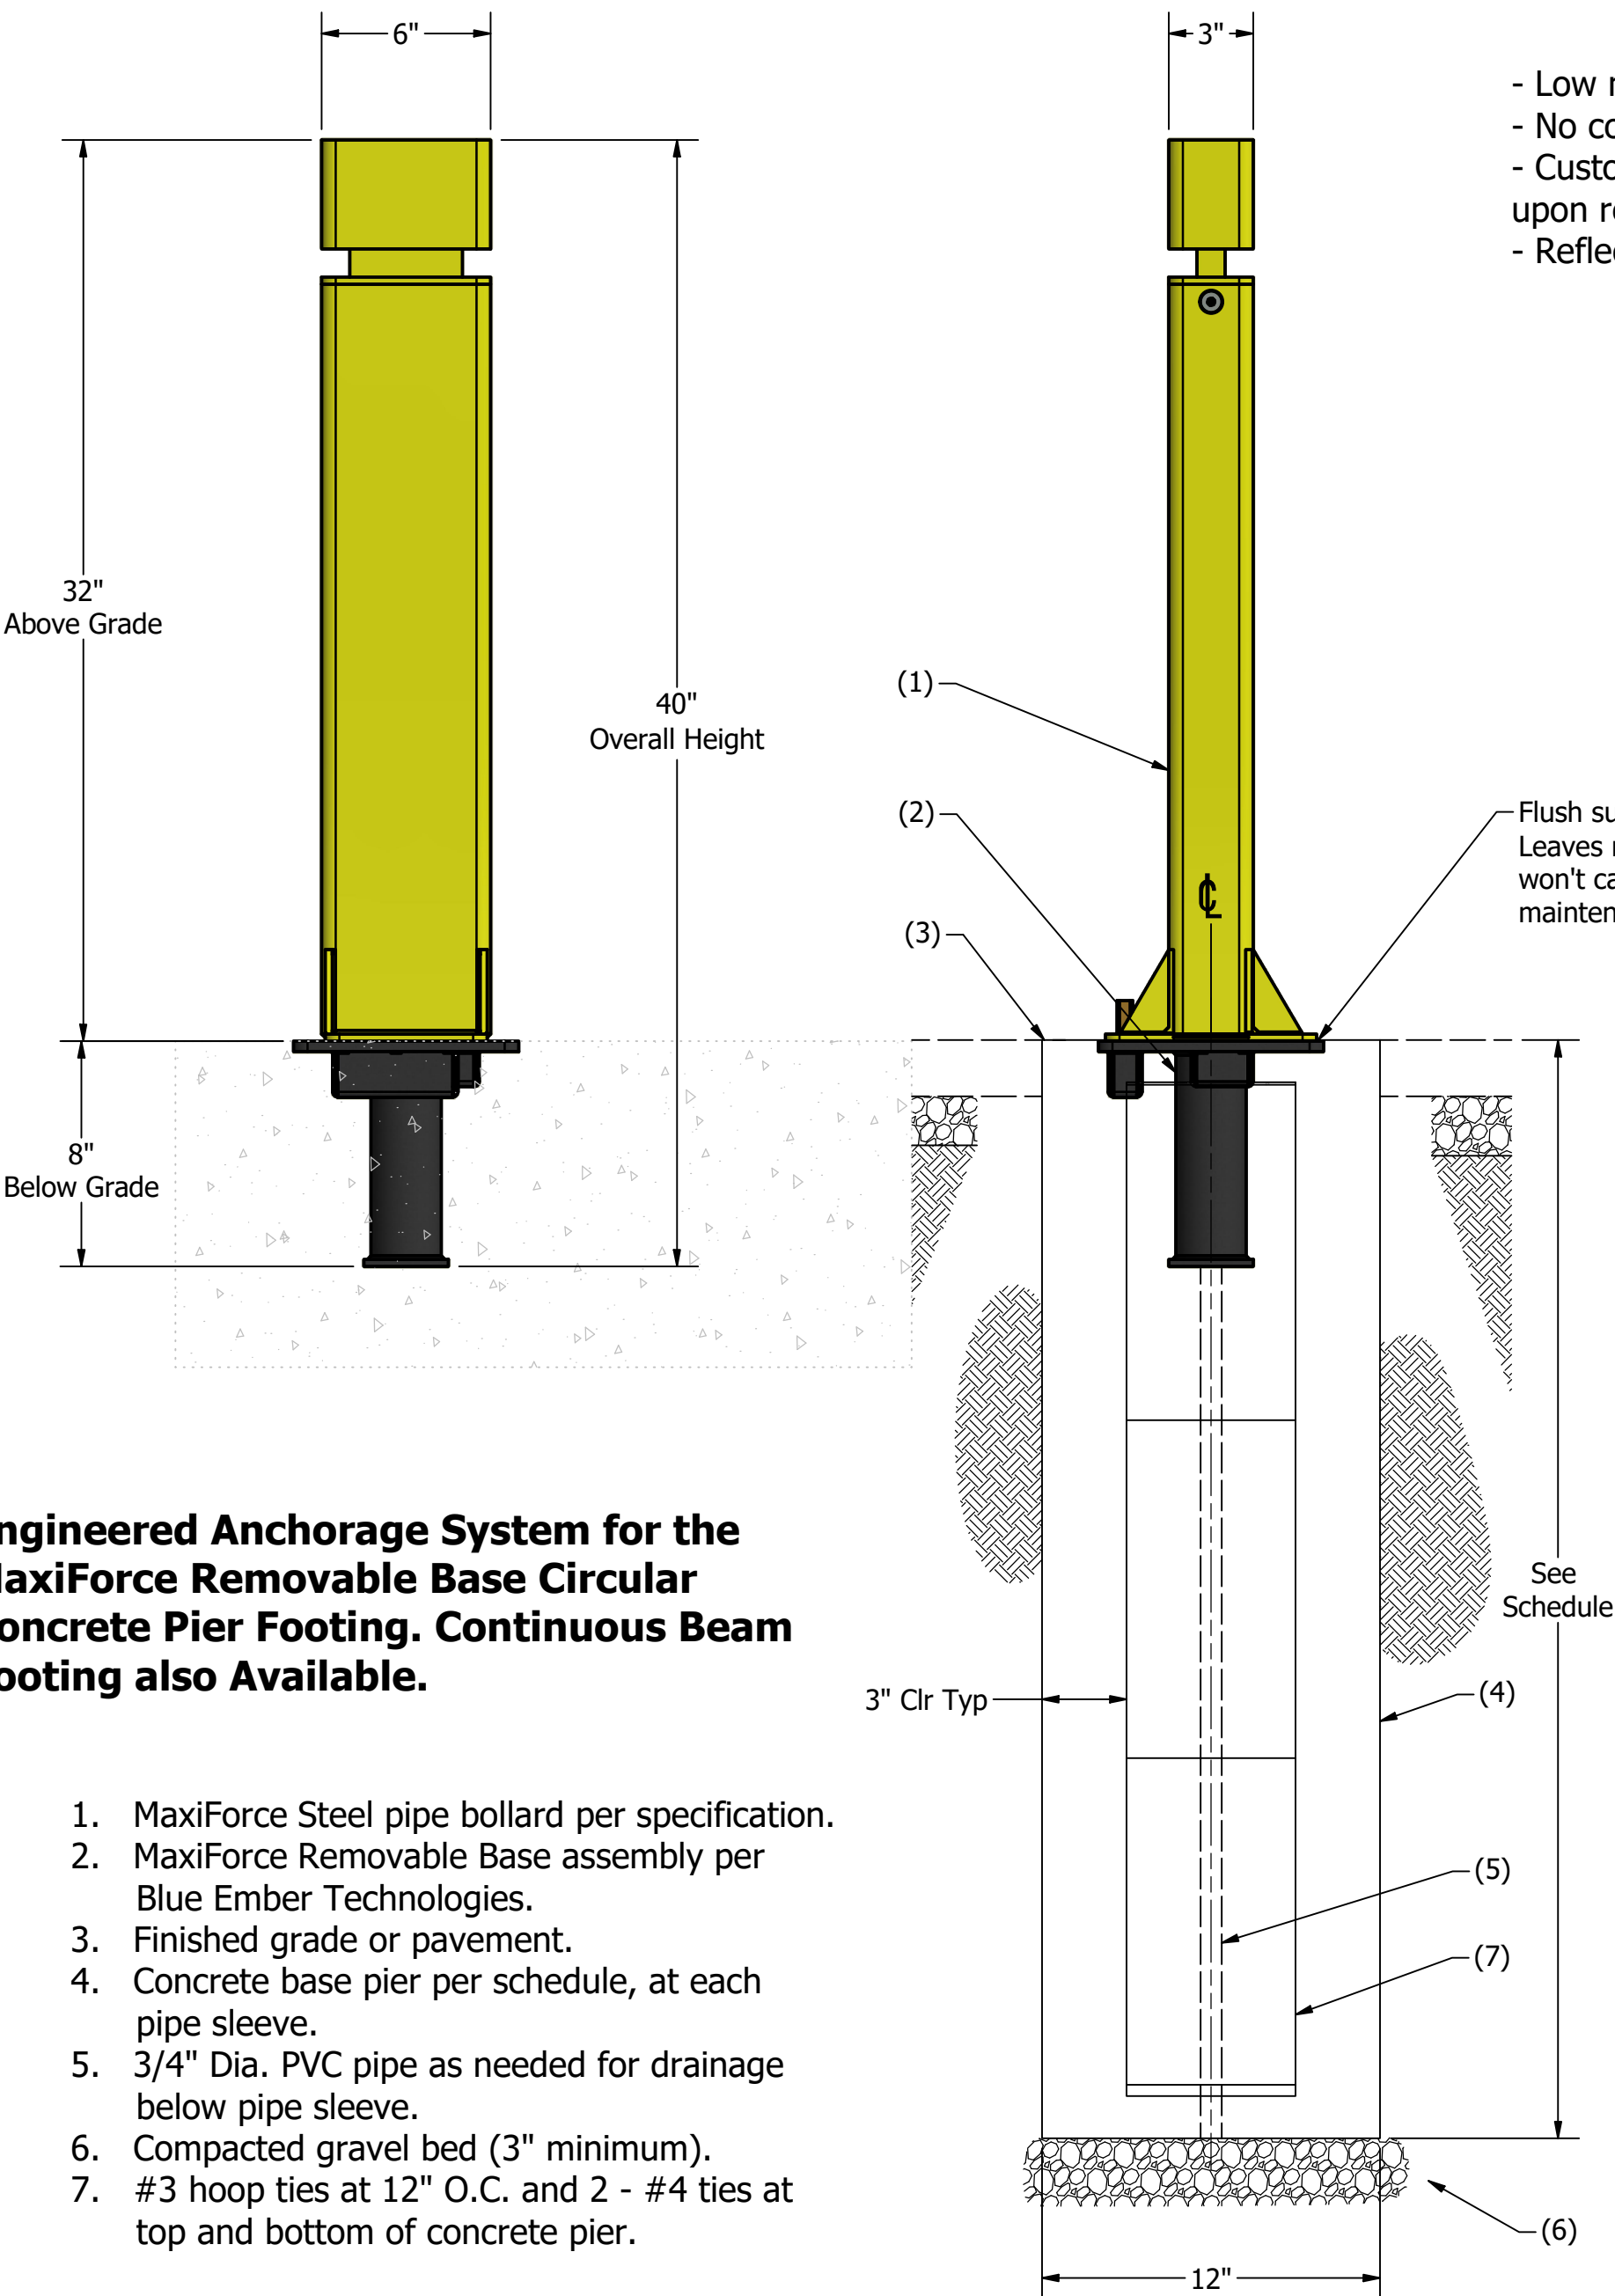


Engineered Anchorage System for the MaxiForce Removable Base Circular Concrete Pier Footing. Continuous Beam Footing also Available.

- MaxiForce Steel pipe bollard per specification.
- MaxiForce Removable Base assembly per Blue Ember Technologies.
- Finished grade or pavement.
- Concrete base pier per schedule, at each pipe sleeve.
- 3/4" Dia. PVC pipe as needed for drainage below pipe sleeve.
- Compacted gravel bed (3" minimum).
- #3 hoop ties at 12" O.C. and 2 - #4 ties at top and bottom of concrete pier.

Installation
Orientation

Public Side



Protected Side

Bollard Assy. Weight	Base Weight
42 lb	9.5 lb
Drawing Rev.	Created
2	4/18/2023
PROPRIETARY AND CONFIDENTIAL	
THIS DRAWING CONTAINS PROPRIETARY INFORMATION OF BLUE EMBER TECHNOLOGIES, LLC. ANY USE OF THIS DRAWING OR THE INFORMATION CONTAINED HEREIN FOR OTHER THAN THE PURPOSE FOR WHICH THIS DRAWING IS FURNISHED IS FORBIDDEN.	