




MaxiForce Collapsible Bollard

Standard Body, Wrench Operated, Standard Style 2 Head, Simple Base


AHJ approved in many cities / counties / campuses for use in fire lanes per International Fire Code (IFC) 503

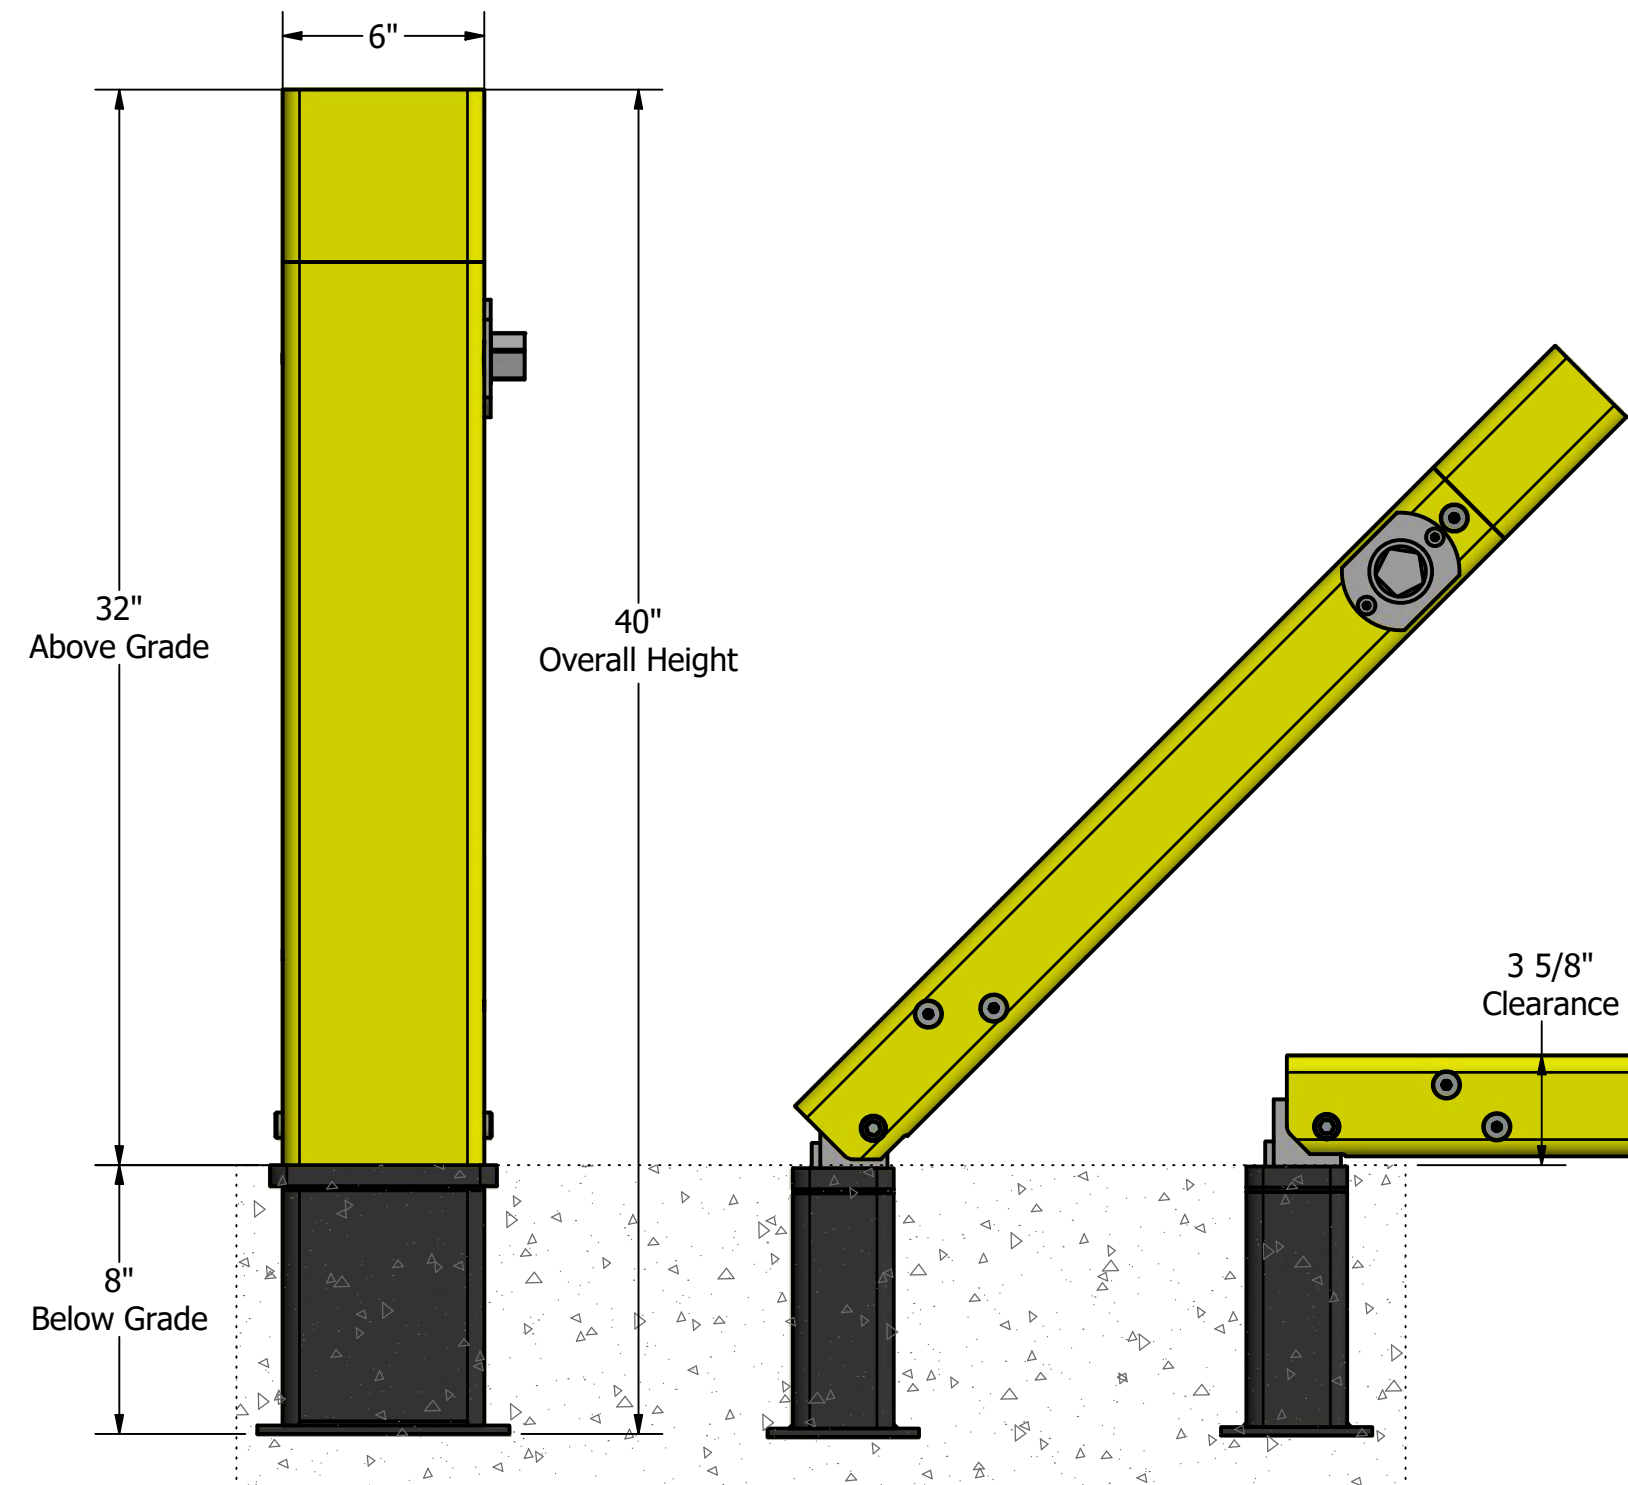

Patented fire hydrant wrench operation works with any standard fire hydrant wrench by turning the nut 1/4 turn to unlock and lower the bollard. (1-3/8" nut standard)
**Free standard hydrant wrench included with each order*

Patented break-away design allows instant emergency access without a key. This unit can be pushed over with the bumper of a vehicle.

Flush surface when bollard is removed. Leaves no tripping hazard and won't catch snow plows or other maintenance equipment.

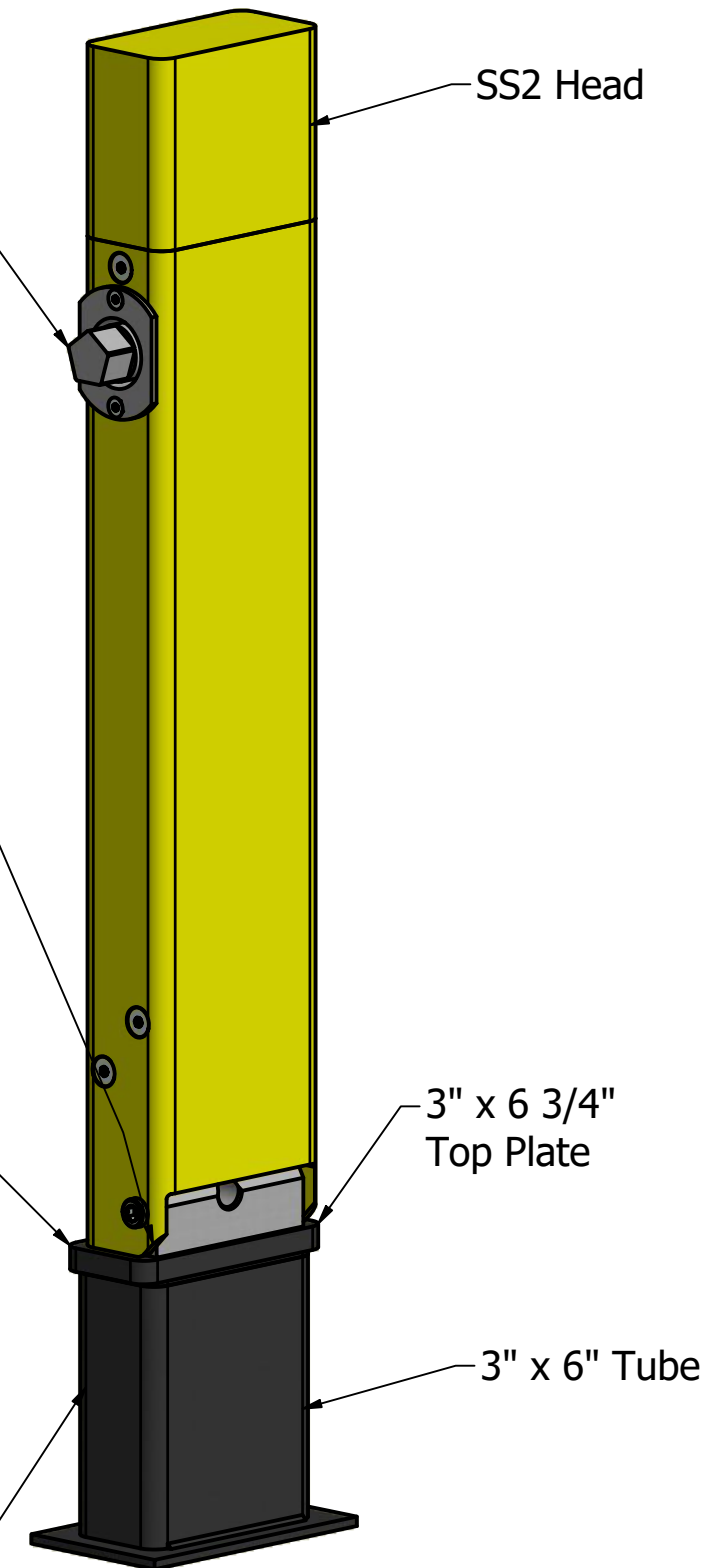

- Low Maintenance / Durable steel construction
- One year warranty / Protected by \$1,000,000 in liability insurance
- No complex assembly required in the field
- Custom sizes, options, colors and finishes available upon request
- Finish options available (add code to the end of the model number)
 - Powder coated (PC)
 - Powder coated with DRYZINC primer (PCZ)
 - Hot dip galvanized (G)
 - Hot dip galvanized & powder coated (GPC)
- Reflective tape available upon request

Bollard Assy. Weight	Base Weight
55 lbs	14 lbs
Drawing Rev.	Created
2	11/27/2020
PROPRIETARY AND CONFIDENTIAL	
THIS DRAWING CONTAINS PROPRIETARY INFORMATION OF BLUE EMBER TECHNOLOGIES, LLC. ANY USE OF THIS DRAWING OR THE INFORMATION CONTAINED HEREIN FOR OTHER THAN THE PURPOSE FOR WHICH THIS DRAWING IS FURNISHED IS FORBIDDEN.	

MaxiForce
7560 Main Street
Sykesville, MD 21784
tel: +1 (410) 552 9888
sales@maxiforcebollards.com
www.maxiforcebollards.com



MCSW-SS2-S